



COUNTERSUNK FINISHING WASHERS

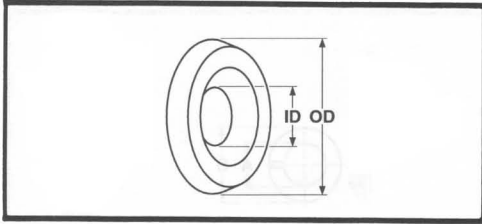

Screw Size	OD	ID	
		Min.	Max.
6	.469	.170	.200
8	.531	.180	.210
10	.593	.235	.265
12	.656	.259	.289
1/4	.781	.305	.335

HI-COLLAR HELICAL SPRING LOCK WASHERS

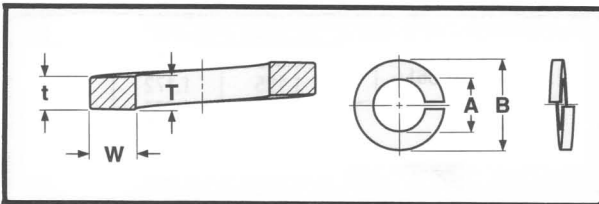

Nominal Washer Size		A		B	W	$\frac{I \pm t}{2}$
		Inside Diameter		Outside Diameter	Washer Section	
		Min.	Max.	Max.	Width	Thickness
4	0.112	0.115	0.121	0.173	0.022	0.022
6	0.138	0.141	0.148	0.216	0.030	0.030
8	0.164	0.168	0.175	0.267	0.042	0.047
10	0.190	0.194	0.202	0.294	0.042	0.047
1/4	0.250	0.255	0.263	0.365	0.047	0.078
5/16	0.312	0.318	0.238	0.460	0.062	0.093
3/8	0.375	0.382	0.393	0.533	0.076	0.125