


Dimensional Data

NYLON INSERT STOP NUTS

Nominal Size or Basic Thread Diameter		F			H		I	G
		Width Across Flats			Thickness		Side Height	Width Across Corners
		Basic	Max.	Min.	Max.	Min.	Ref.	Ref.
4	0.1120	1/4	0.251	0.241	0.153	0.133	0.081	0.268
6	0.1380	5/16	0.313	0.302	0.188	0.168	0.103	0.399
8	0.1640	11/32	0.345	0.332	0.239	0.219	0.140	0.374
10	0.1900	3/8	0.376	0.362	0.249	0.229	0.140	0.410
1/4	0.2500	7/16	0.439	0.428	0.328	0.298	0.225	0.482
5/16	0.3125	1/2	0.502	0.489	0.359	0.329	0.250	0.552
3/8	0.3750	9/16	0.565	0.551	0.468	0.438	0.335	0.622
7/16	0.4375	11/16	0.690	0.675	0.468	0.438	0.324	0.698
1/2	0.5000	3/4	0.752	0.736	0.609	0.579	0.464	0.837
9/16	0.5625	7/8	0.877	0.861	0.656	0.626	0.469	0.978
5/8	0.6250	15/16	0.940	0.922	0.765	0.735	0.593	1.051
3/4	0.7500	1-1/8	1.127	1.088	0.890	0.860	0.742	1.191
7/8	0.8750	1-5/16	1.315	1.269	0.999	0.969	0.790	1.430
1	1.0000	1-1/2	1.502	1.450	1.078	1.061	0.825	1.615
1-1/8	1.1250	1-11/16	1.690	1.631	1.203	1.141	0.930	1.826
1-1/4	1.2500	1-7/8	1.877	1.812	1.422	1.360	1.125	2.038
1-1/2	1.5000	2-1/4	2.252	2.175	1.640	1.578	1.313	2.444

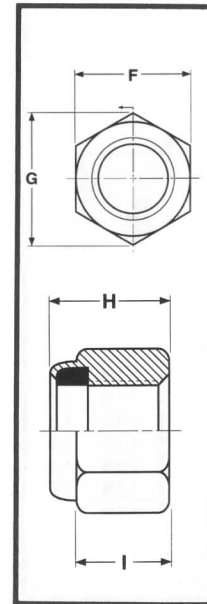

NYLON INSERT STOP NUTS

Thin Pattern

Nominal Size or Basic Thread Diameter		F			H		I	G
		Width Across Flats			Thickness		Side Height	Width Across Corners
		Basic	Max.	Min.	Max.	Min.	Ref.	Ref.
4	.1120	1/4	.251	.241	.124	.094	.075	.268
6	.1380	5/16	.313	.302	.140	.110	.090	.399
8	.1640	11/32	.345	.332	.187	.157	.110	.374
10	.1900	3/8	.376	.362	.187	.157	.110	.410
1/4	.2500	7/16	.439	.428	.218	.188	.125	.482
5/16	.3125	1/2	.502	.489	.265	.235	.158	.552
3/8	.3750	9/16	.565	.551	.281	.251	.150	.622
7/16	.4375	11/16	.690	.675	.328	.298	.190	.694
1/2	.5000	3/4	.752	.736	.328	.298	.225	.837
5/8	.6250	15/16	.940	.922	.406	.376	.264	1.051
3/4	.7500	1-1/8	1.127	1.088	.421	.391	.288	1.191

