


HEX SLOTTED NUTS

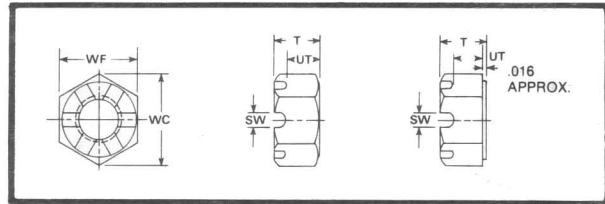

Nominal Diameter		WF			WC		T			UT		SW		Runout of Bearing Surface FIR
		Width Across Flats			Width Across Corners		Thickness			Unslotted Thickness		Width of Slot		
Fractional	Decimal	Basic	Max	Min	Max	Min	Basic	Max	Min	Max	Min	Max	Min	Max
1/4	0.2500	7/16	0.438	0.428	0.505	0.488	7/32	0.226	0.212	0.14	0.12	0.10	0.07	0.015
5/16	0.3125	1/2	0.500	0.489	0.577	0.557	17/64	0.273	0.258	0.18	0.16	0.12	0.09	0.016
3/8	0.3750	9/16	0.562	0.551	0.650	0.628	21/64	0.337	0.320	0.21	0.19	0.15	0.12	0.017
7/16	0.4375	11/16	0.688	0.675	0.794	0.768	3/8	0.385	0.365	0.23	0.21	0.15	0.12	0.018
1/2	0.5000	3/4	0.750	0.736	0.866	0.840	7/16	0.448	0.427	0.29	0.27	0.18	0.15	0.019
9/16	0.5625	7/8	0.875	0.861	1.010	0.982	31/64	0.496	0.473	0.31	0.29	0.18	0.15	0.020
5/8	0.6250	15/16	0.938	0.922	1.083	1.051	35/64	0.559	0.535	0.34	0.32	0.24	0.18	0.021
3/4	0.7500	1- 1/8	1.125	1.088	1.299	1.240	41/64	0.665	0.617	0.40	0.38	0.24	0.18	0.023
7/8	0.8750	1- 5/16	1.312	1.269	1.516	1.447	3/4	0.776	0.724	0.52	0.49	0.24	0.18	0.025
1	1.0000	1- 1/2	1.500	1.450	1.732	1.653	55/64	0.887	0.831	0.59	0.56	0.30	0.24	0.027
1-1/8	1.1250	1-11/16	1.688	1.631	1.949	1.859	31/32	0.999	0.939	0.64	0.61	0.33	0.24	0.030
1-1/4	1.2500	1- 7/8	1.875	1.812	2.165	2.066	1- 1/16	1.094	1.030	0.70	0.67	0.40	0.31	0.033
1-3/8	1.3750	2- 1/16	2.062	1.994	2.382	2.273	1-11/64	1.206	1.138	0.82	0.78	0.40	0.31	0.036
1-1/2	1.5000	2- 1/4	2.250	2.175	2.598	2.480	1- 9/32	1.317	1.245	0.86	0.82	0.46	0.37	0.039

Note: Most hex slotted nuts are manufactured without washer face bearing surface