


SOCKET PIPE PLUG FLUSH SEAL


7/8" Taper

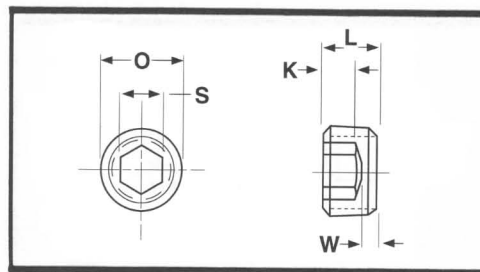

Nominal Size	O	Threads Per Inch	S	K	W	L		Tightening Torque (Inch-Lbs.)
	Nominal O.D.		Hex Socket Size	Key Engagement	Wall Thickness	Overall Length		
						Min	Min	
1/16	0.307	27	5/32	.140	.052	.250	.235	150
1/8	0.401	27	3/16	.140	.049	.250	.235	250
1/4	0.529	18	1/4	.218	.045	.406	.391	600
3/8	0.667	18	5/16	.250	.040	.406	.391	1200
1/2	0.830	14	3/8	.312	.067	.531	.516	1800
3/4	1.041	14	9/16	.312	.054	.531	.516	3000
1	1.302	11-1/2	5/8	.375	.112	.656	.641	4200
1-1/4	1.647	11-1/2	3/4	.437	.102	.656	.641	5400

SOCKET PIPE PLUG DRY SEAL

3/4" Taper

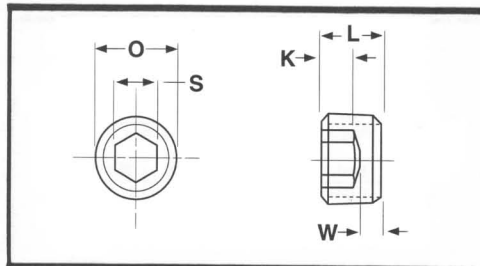

Nominal Size	O	Threads Per Inch	S	K	W	L		Tightening Torque (Inch-Lbs.)
	Nominal O.D.		Hex Socket Size	Key Engagement	Wall Thickness	Overall Length		
						Min	Min	
1/16	0.3120	27	5/32	.1400	.0620	.3240	.3000	150
1/8	0.4050	27	3/16	.1400	.0620	.3240	.3000	250
1/4	0.5400	18	1/4	.2180	.0730	.4570	.4170	600
3/8	0.6750	18	5/16	.2500	.0840	.5200	.4800	1200
1/2	0.8400	14	3/8	.3120	.0950	.5820	.5420	1800
3/4	1.0500	14	9/16	.3120	.1250	.6450	.6050	3000
1	1.3150	11-1/2	5/8	.3750	.1250	.7700	.7300	4200
1-1/4	1.6600	11-1/2	3/4	.4370	.1560	.8320	.7920	5400
1-1/2	1.9000	11-1/2	1	.4370	.1560	.8430	.7800	6900
2	2.3750	11-1/2	1	.4370	.1560	.9060	.8440	8500