



STOVER LOCKNUTS

Grade C Automation Style

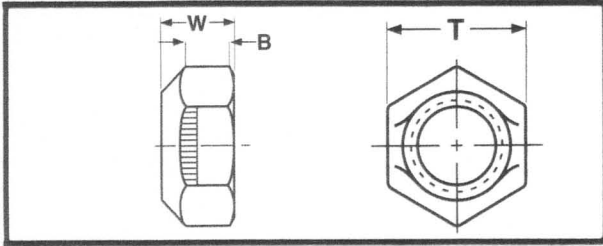

Nom. Size In Inches	T			W		B
	Width	Across	Flats	Overall Thickness		Hex Height
	Nom.	Max.	Min.	Max.	Min.	(Min.)
1/4	7/16	0.4385	0.428	0.226	0.212	0.145
5/16	1/2	0.5020	0.489	0.273	0.258	0.166
3/8	9/16	0.5645	0.551	0.337	0.320	0.198
7/16	11/16	0.6895	0.675	0.385	0.365	0.223
1/2	3/4	0.7520	0.736	0.448	0.427	0.262
9/16	7/8	0.8770	0.861	0.496	0.473	0.286
5/8	15/16	0.9395	0.922	0.559	0.535	0.329
3/4	1-1/8	1.1270	1.088	0.665	0.617	0.382
7/8	1-5/16	1.3145	1.2690	0.776	0.724	0.450
1	1-1/2	1.5020	1.4500	0.887	0.831	0.513

Grade GT Flange Style

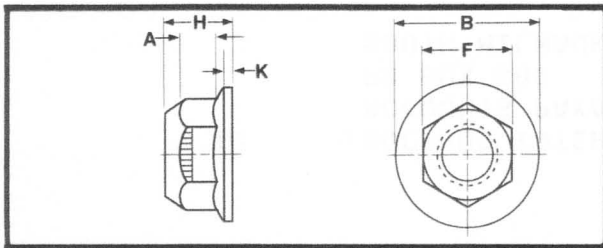

Nom. Size In Inches	F			B	H		A	K
	Width	Across	Flats	Flange Diam.	Overall Thickness		Hex Height	Flange Thick.
	Nom.	Max.	Min.	(Max.)	Max.	Min.	(Min.)	(Min.)
3/8	9/16	0.5645	0.551	0.810	0.425	0.404	0.200	0.060
1/2	3/4	0.7520	0.736	1.070	0.555	0.528	0.260	0.080
5/8	15/16	0.9395	0.922	1.330	0.690	0.646	0.320	0.100
3/4	1-1/8	1.1270	1.088	1.585	0.825	0.742	0.380	0.110